

## M2701 SERIES

### 3-PHASE AC/DC POWER SUPPLY



#### PRODUCT HIGHLIGHTS

- 3-PHASE AC/DC POWER SUPPLY
- HIGH EFFICIENCY
- HIGH VOLTAGE
- SINGLE OUTPUT
- UP TO 500 W



**Cham, Switzerland**  
[www.enercon-europe.com](http://www.enercon-europe.com)  
[enercon@enercon-europe.com](mailto:enercon@enercon-europe.com)  
+41 41 740 4554

Global Headquarters

**Netanya, Israel**  
[www.enercon.co.il](http://www.enercon.co.il)  
[sales@enercon.co.il](mailto:sales@enercon.co.il)  
+972-73-246 9200



**Gurgaon, India**  
[www.mpsindia.in](http://www.mpsindia.in)  
[sales@mpsindia.in](mailto:sales@mpsindia.in)  
+91-124-651 0010

***Applications***

Military (ground-fix, shipboard), Ruggedized, Telecom, Industrial

***Special Features***

- Miniature size
- High efficiency
- Wide input range
- Input / Output Isolation
- Inrush Current Limiter
- Fixed switching freq. (250 kHz)
- External Inhibit
- EMI filters included
- Non-latching automatic recovery protections:
  - Short-circuit
  - Over temperature

***Electrical Specifications***

**AC Input**

115 V<sub>RMS,L-N</sub> ± 10% , 400 Hz  
3-Phase

**Efficiency**

Typically 90%  
(270V<sub>DC</sub> output, full load, nominal input voltage, room temperature)

**Isolation – Low voltage version**

Input to Output: 500 V<sub>DC</sub>  
Input to Case: 500 V<sub>DC</sub>  
Output to Case: 500 V<sub>DC</sub>

**Transient over-and-undershoot**

Output resistance at load change of 50% to 100% is 1.5 Ω, typical.

**DC Output**

Voltage range: 100 to 320 V<sub>DC</sub>  
Current range: 0 to 5 A  
Power range: 0 to 500 W

**Output voltage regulation**

Less than ±1%  
(no load to full load, –55°C to +85°C and over normal input voltage range).

**Isolation – High voltage version**

Input to Output: 1 000 V<sub>DC</sub>  
Input to Case: 200 V<sub>DC</sub>  
Output to Case: 1 000 V<sub>DC</sub>

**Abnormal surge (no damage)**

IAW MIL-STD-704A-F:  
0 V to 180V

**Ripple & Noise**

Less than 100mV<sub>p-p</sub>, typical (max. 1%) without external capacitance. When connected to system capacitance ripple drops significantly.

**EMC**

Designed to meet MIL-STD-461F  
CE102, CS101, CS114, CS115, CS116, RE102, RS101, RS103.

**Protections \***

**Input**

- **Inrush Current Limiter**  
Peak value of 5x I<sub>IN</sub> for inrush current lasting over 50µsec.

**Output**

- **Passive Over-Voltage Protection** Transorb assembled across the output pins, selected at 120% ± 10% of nominal voltage.
- **Current Limiting**  
Continuous protection (10-30% above maximum current) for unlimited time (Hiccup).

**General**

- **Over Temperature Protection** Unit shuts down if baseplate temperature rises above +105°C ± 5°C.  
Automatic recovery when baseplate temperature falls below +95°C ± 5°C.

**Environmental Conditions**

Designed to meet MIL-STD-810G

**Temperature**

Operating: -55 °C to +85 °C (at baseplate)  
Storage: -55 °C to +125 °C

**Altitude**

Method 500.4  
Procedures I & II – Up to 33 kft.  
Higher altitude option.

**Salt Fog**

Method 509.4

**Humidity**

Method 507.4  
Procedure I  
Up to 95% RH

**Vibration (random)**

Method 514.5  
Category 4 - General minimum integrity exposure  
IAW Figure 514.5C-17  
1 hour per axis.

**Shock**

Method 516.5  
Procedure I  
20 g, 11 ms terminal peak saw-tooth,

**Reliability**

150 000 hours, calculated IAW MIL-HDBK-217F Notice 2 at +85 °C baseplate, Ground Fixed environment.

**Environmental Stress Screening (ESS)**

Including random vibration and thermal cycles is also available. **Please consult factory for details.**




**Notes:**



\* Thresholds and protections can be modified / removed – please consult factory.



**Pin Assignment †**


**J1 - Input Connector**

Type: M24308/24-38F or eq.  
 Mates with: M24308/2-2F or eq.

Pin No.	Function	
1	PHASE A	
2	N.C.	
3	PHASE B	
4	N.C.	
5	PHASE C	





Pin No.	Function	
6	N.C.	
7	N.C.	
8	CHASSIS	
9	PHASE A	
10	N.C.	




Pin No.	Function	
11	PHASE B	
12	N.C.	
13	PHASE C	
14	N.C.	
15	N.C.	








**J2 - Output Connector**

Type: M24308/23-38F or eq.  
 Mates with: M24308/4-2F or eq.

Pin No.	Function	
1	BIT	
2	N.C.	
3	INHBIT	
4	OUT	
5	OUT	

Pin No.	Function	
6	N.C.	
7	OUT RTN	
8	OUT RTN	
9	BIT RTN	
10	N.C.	

Pin No.	Function	
11	OUT	
12	OUT	
13	N.C.	
14	OUT RTN	
15	OUT RTN	



† All pins with identical function/designation should be connected together for best performance.

### Functions and Signals

**INHIBIT** (connector J2, pin 3)

The INHIBIT signal is used to turn the power supply ON and OFF.

“1” or OPEN – Power supply active (output turned on).

“0” or SHORT to OUT RTN – Power supply inhibited (output turned off). If this function is not required, leave this pin unconnected.

**BIT** (connector J2, pin 1)

The BIT signal indicates the status of the output voltage.

When output voltage rises above  $90\% \pm 5\%$  of its nominal value, pin 1 will be pulled down to pin 9 through a  $20\ \Omega \pm 1\%$  resistor and a phototransistor.

When output voltage falls below  $90\% \pm 5\%$  of its nominal value, pin 1 will be in high impedance mode.

If not used, leave this pin open.

This signal is referenced to **BIT RTN pin (connector J2, pin 9)**

Absolute maximum voltage between BIT and BIT RTN:  $52\ V_{DC}$


Absolute maximum current into BIT pin: 2 mA (connect external voltage to this pin via an external resistor)

Both pins 1 and 9 are isolated from all other parts of the circuitry.


**CHASSIS** (connector J1, pin 8)

The CHASSIS pin allows additional connection of unit's chassis to system ground.

### Typical Connection Diagram

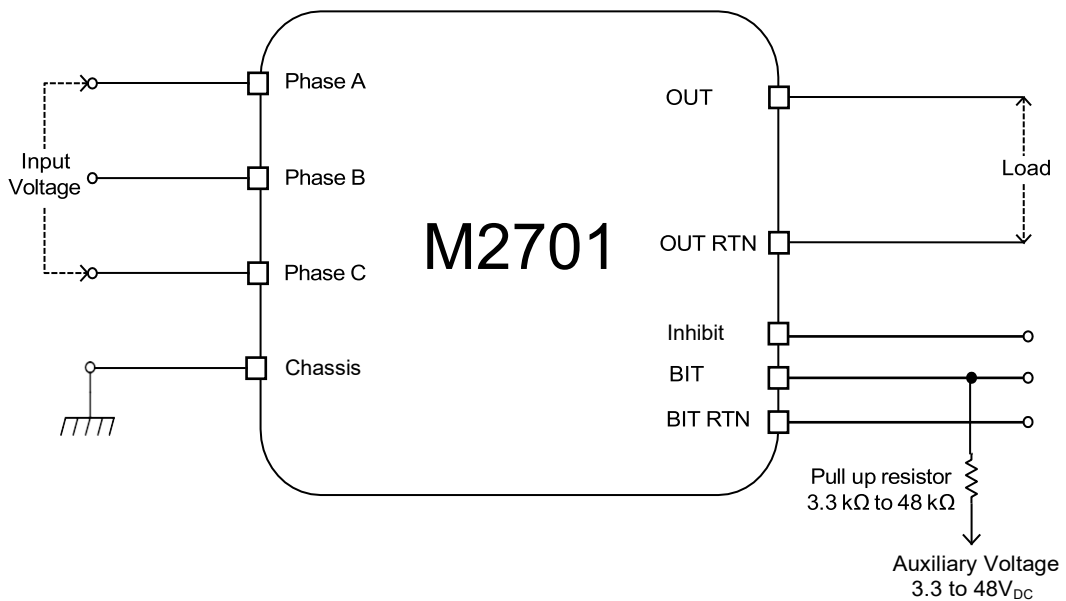

**Outline Drawing**

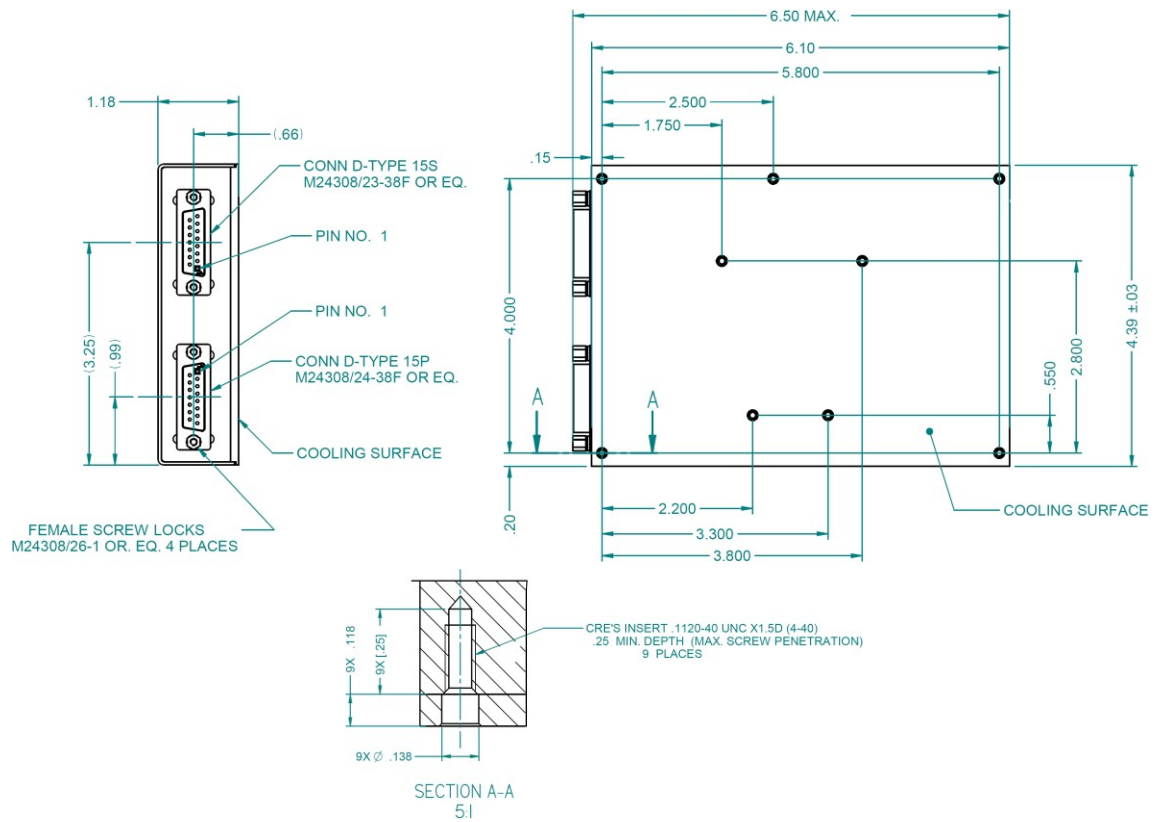

**Notes**

1. Dimensions are in inches [mm]
2. Tolerance is:  
    .XX ± 0.02 in  
    .XXX ± 0.010 in
3. Weight: TBD oz [TBD g]

*Note: Specifications are subject to change without prior notice by the manufacturer*