


## M7019 SERIES

*DC/DC POWER SUPPLY*

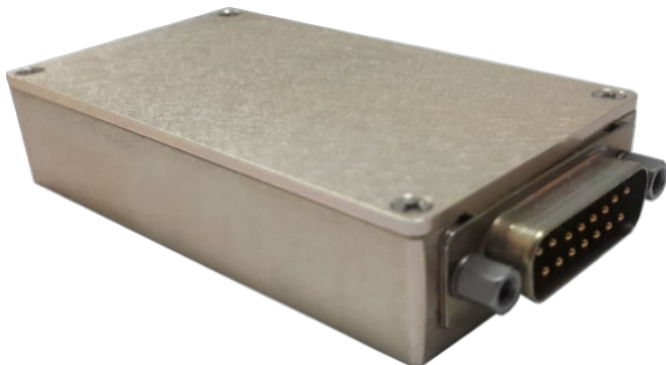

### PRODUCT HIGHLIGHTS

- DC/DC POWER SUPPLY
- SINGLE OUTPUT
- UP TO 100 W
- MINIATURE
- HIGH DENSITY



**Applications**

Military (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial Power Supply

**Special Features**

- Miniature size
- High efficiency
- Input / Output isolation
- Fixed switching freq.
- EMI filters included
- Remote inhibit (On/Off)
- Non-latching protections:
  - Input under/over voltage
  - Overload/Short-circuit
  - Over temperature

**Electrical Specifications**

**DC Input Standard Version**

Normal steady-state voltage range: 18 to 48 V<sub>DC</sub>

**Extended Input Option**– please consult factory.

IAW MIL-STD-1275E (12 to 100 V<sub>DC</sub>)

IAW MIL-STD-704A-F (6 to 80 V<sub>DC</sub>)

**Output voltage regulation**

Less than ±1% (low to high input voltage, no load to full load, –55 °C to +85 °C at baseplate).

**DC Output**

Voltage range: 3.3 to 56 V

Current range: 0 to 15 A

Power range: 0 to 100 W

**Efficiency**

87% typical (28V variant, at nominal input voltage, full load, room temperature)

**Ripple and Noise**

100-150 mV<sub>p-p</sub>, typical (max. 1%) without external capacitance.

**Isolation**

Input to Output: 200 V<sub>DC</sub>

Input to Case: 200 V<sub>DC</sub>

Output to Case: 100 V<sub>DC</sub>

**EMC**

Designed to meet \* MIL-STD-461F CE101, CE102, CS101, CS114, CS115, CS116, RE101, RE102, RS101, RS103.

**Turn-on Transient**

No overshoot.

\* Compliance achieved with 5µH LISN, shielded harness and static resistive load.

**Protections\*\***

**Input**

- **Under-Voltage Lockout**  
Standard version converter shuts if input voltage is below  $16 \pm 1V$ .  
**For extended Input option – please consult factory.**
- **Over-Voltage Lockout**  
Standard version converter shuts down if input voltage is above  $53 \pm 1V$ .  
**For extended Input option – please consult factory.**
- **Reverse Polarity Protection**  
Protection for unlimited time.

**Output**

- **Active Over-Voltage Protection**  
Secondary control circuit takes over if output voltage exceeds  $110\% \pm 5\%$  of nominal voltage.
- **Passive Over-Voltage Protection**  
Transorb at output selected  $20\% \pm 5\%$  above nominal voltage.
- **Overload / Short-Circuit Protection**  
Output voltage turns off and on periodically with low duty-cycle (hiccup) to protect system conductors and converter from short circuit and overload.

**General**

- **Over Temperature Protection**  
Shutdown if baseplate temperature exceeds  $+105\text{ }^\circ\text{C} \pm 5\text{ }^\circ\text{C}$ .  
Automatic recovery upon cooldown to below  $+95\text{ }^\circ\text{C} \pm 5\text{ }^\circ\text{C}$ .

**Environmental Conditions**

Designed to meet MIL-STD-810G

**Temperature**

Methods 501.5 & 502.5  
Operating:  $-55\text{ }^\circ\text{C}$  to  $+85\text{ }^\circ\text{C}$  (at baseplate)  
Storage:  $-55\text{ }^\circ\text{C}$  to  $+125\text{ }^\circ\text{C}$  (ambient)

**Vibration**

Method 514.6  
Category 7: Aircraft – Jet, IAW figure C-6, 13.7grams, 1 hour per axis.  
  
Category 24: Minimum integrity, IAW figure E-3, 7.7 grams, 1 hour per axis.

**Altitude**

Method 500.5  
Procedures I – up to 70,000 ft. (non-operational)  
Procedure II – up to 70,000 ft. (operational)

**Shock**

Method 516.6  
Operational shock: 30 g, 11 ms, half-sine  
Crash safety: 100 g, 6 ms, half-sine

**Humidity**

Method 507.5  
Up to 95% RH

**Salt Fog**

Method 509.5

**Reliability**

150,000 hours, calculated per MIL-STD-217F Notice 2 at  $+85\text{ }^\circ\text{C}$  baseplate, Ground Fix environment.

**Environmental Stress Screening (ESS)**

Including random vibration and thermal cycles is also available. Please consult factory for details.


---

\*\* Thresholds and protections can be modified / removed – please consult factory.

Test Results

CE102 MIL-STD-461F Conducted Emission, 10 kHz -150 kHz

Line (nominal input voltage, full load)

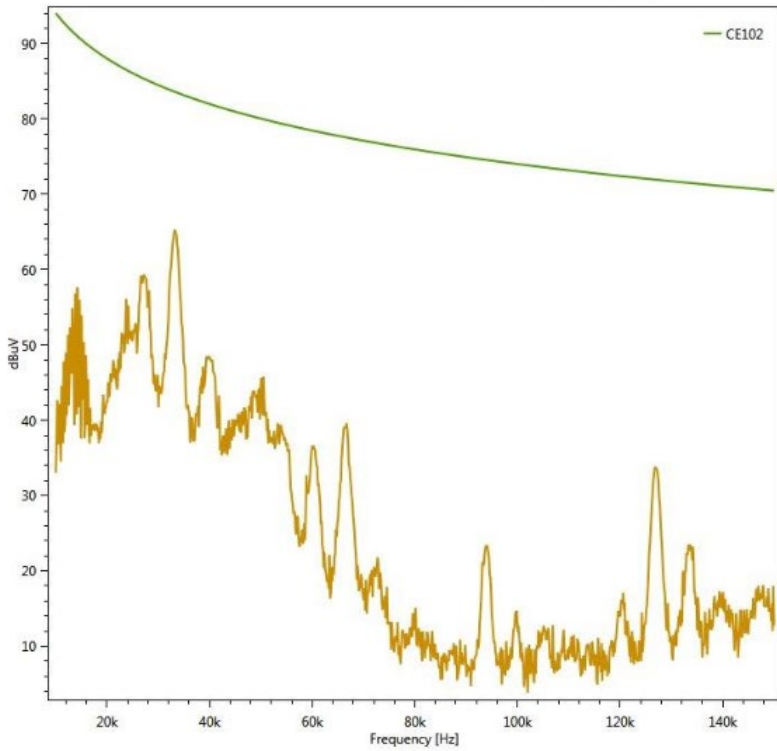

**Trace**  
Name:  
Description:  
Parameters:  
Resolution BW: 1kHz  
Video BW: 3kHz  
Sweep Time: 6.4sec


**Limit**  
Name: CE102  
Description: CE102 Limit

**Cursor:**

**Probe**  
Voltage LSIN

CE102 MIL-STD-461F Conducted Emission, 10 kHz -150 kHz

Return (nominal input voltage, full load)

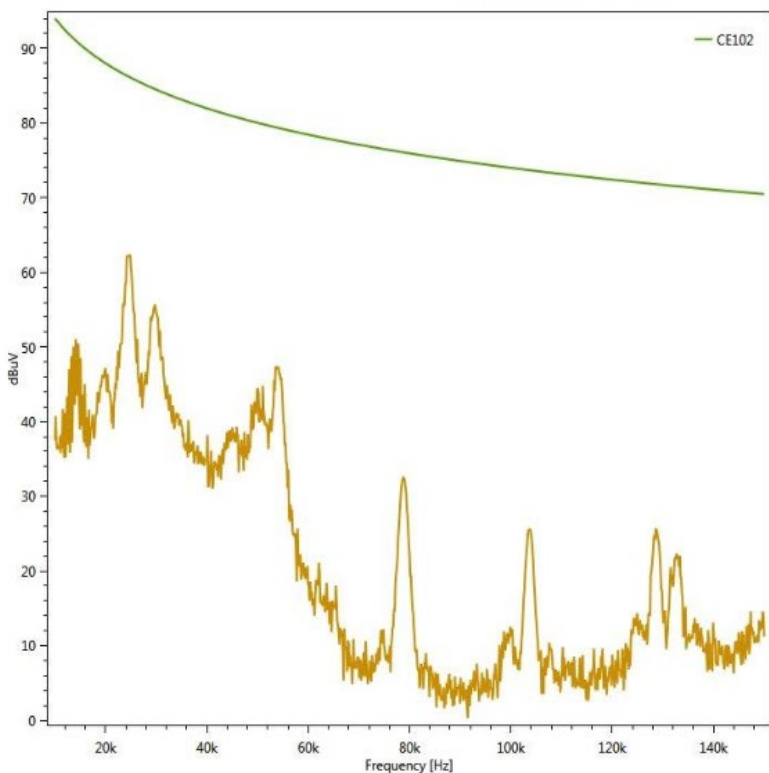

**Trace**  
Name:  
Description:  
Parameters:  
Resolution BW: 1kHz  
Video BW: 3kHz  
Sweep Time: 6.4sec


**Limit**  
Name: CE102  
Description: CE102 Limit

**Cursor:**  
154kHz  
CE102 70.25dBuV

**Probe**  
Voltage LSIN


**CE102 MIL-STD-461F Conducted Emission, 150 kHz -10 MHz**

Line (nominal input voltage, full load)

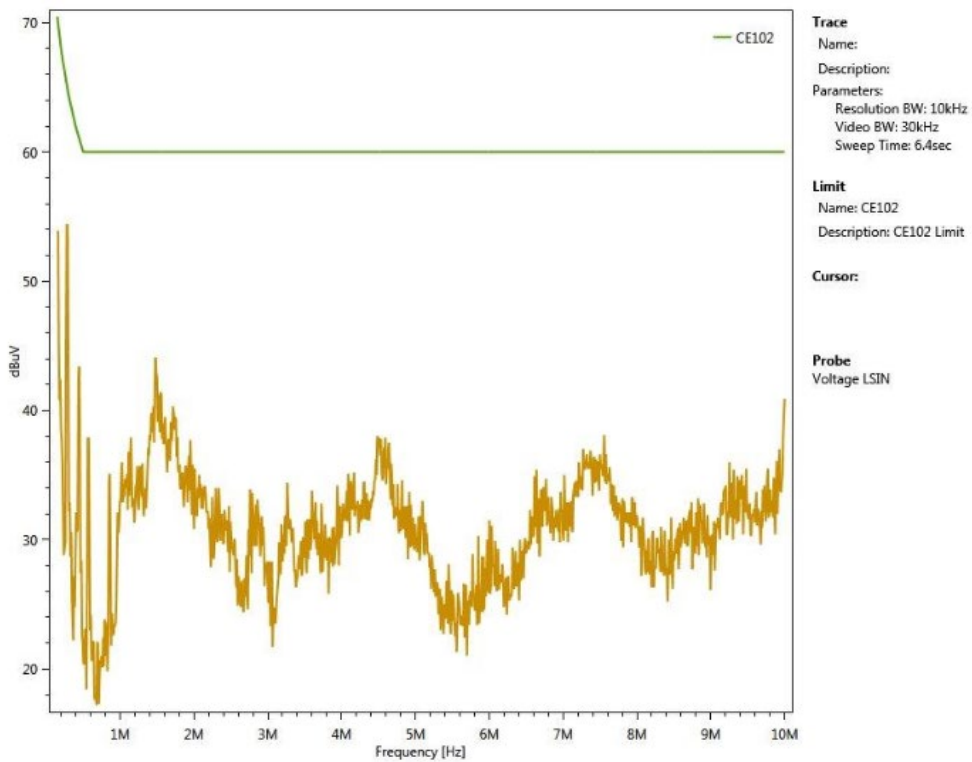

**CE102 MIL-STD-461F Conducted Emission, 150 kHz -10 MHz**

Return (nominal input voltage, full load)

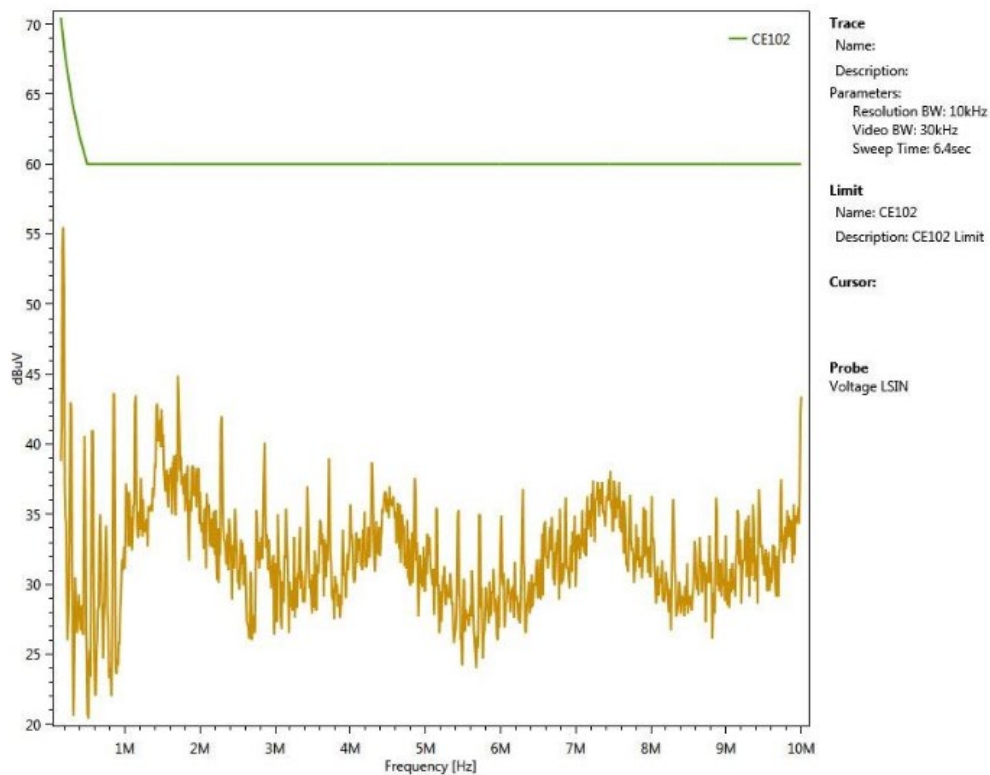

**Functions and Signals**

**INHIBIT** (pin 8)

Description: The **INHIBIT** signal is used to turn the power supply ON and OFF.

Operation: Applying “1” or leaving open will turn the power supply ON. For constant operation, leave this pin unconnected.

Applying “0” or shorting this pin to its return line will turn the power supply OFF.  
(Optional to change the logic of this signal. Please consult with factory.)

Signal Type: 5V TTL or dry contact (open/short).

Return line: This signal is referenced to **INPUT RTN** pin.

**Optional to change the logic of this signal. Please consult with the factory.**

**SENSE** (pin 2) & **SENSE RTN** (pin 3)

Description: The **SENSE** is used to compensate for voltage drop across the output wires by sensing the voltage at the load and correcting the increasing the output voltage accordingly, to provide the desired voltage at the load's terminals.

Operation: Connect the **SENSE** pin to the positive load terminal, and the **SENSE RTN** pin to the negative (return) load terminal.

The sense compensation is typically limited to 5% or 0.5V – the lesser of the two.

**Note:** If not used, connect **SENSE** directly to **OUTPUT** pins, and the **SENSE RTN** pin directly to the **OUTPUT RTN** pins.

**DO NOT LEAVE THE SENSE/SENSE RTN PINS UNCONNECTED-** the output voltage will increase by 5% to 8%.


**Pin Assignment**

**Connector:** M24308/24-38F or eq.


**Mates with:** M24308/2-2F or eq.

| Pin No. | Function   |   |   |
|---------|------------|---|---|
| 1       | OUTPUT     | + | ● |
| 2       | SENSE      | + | ⊗ |
| 3       | SENSE RTN  | - | ⊙ |
| 4       | OUTPUT RTN | - | ● |
| 5       | OUTPUT RTN | - | ● |
| 6       | INPUT RTN  | - | ● |
| 7       | INPUT      | + | ● |
| 8       | INHIBIT    | + | ● |

| Pin No. | Function   |   |   |
|---------|------------|---|---|
| 9       | OUTPUT     | + | ● |
| 10      | OUTPUT     | + | ● |
| 11      | OUTPUT     | + | ● |
| 12      | OUTPUT RTN | - | ● |
| 13      | OUTPUT RTN | - | ● |
| 14      | INPUT RTN  | - | ● |
| 15      | INPUT      | + | ● |



**Outline Drawing**

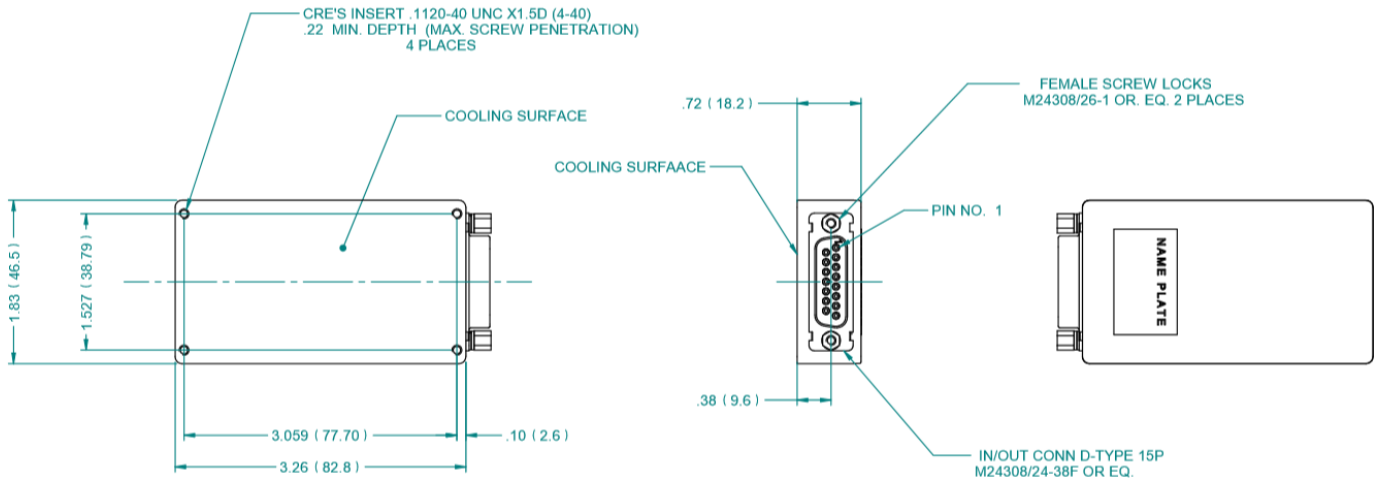

**Notes**

1. Dimensions are in inches  
[mm]
2. Tolerance is:  
.XX ± 0.02 in  
.XXX ± 0.010 in
3. Weight: 134 g

**Standard Configurations**

This P/N can be configured to any output voltage within its possible range (see 'DC Output – Voltage range' in 'Electrical Specifications' table).

| Part Number | Output Voltage     | Max Output Current | Minimum Efficiency |
|-------------|--------------------|--------------------|--------------------|
| M7019-100   | 5 V <sub>DC</sub>  | 15 A               | 82%                |
| M7019-101   | 12 V <sub>DC</sub> | 8 A                | 83%                |
| M7019-102   | 15 V <sub>DC</sub> | 7 A                | 84%                |
| M7019-103   | 24 V <sub>DC</sub> | 4 A                | 85%                |
| M7019-104   | 28 V <sub>DC</sub> | 3.5 A              | 86%                |

Additional standard configurations available. **Consult factory for details.**

***Note: Specifications are subject to change without prior notice by the manufacturer***