

## M7027 SERIES

DC/DC POWER SUPPLY



### PRODUCT HIGHLIGHTS

- MINIATURE
- VERY HIGH DENSITY
- SINGLE OUTPUT
- DC/DC POWER SUPPLY
- UP TO 500 W (750 W PEAK)



**Cham, Switzerland**  
[www.enercon-europe.com](http://www.enercon-europe.com)  
[enercon@enercon-europe.com](mailto:enercon@enercon-europe.com)  
+41 41 740 4554

#### Global Headquarters

**Netanya, Israel**  
[www.enercon.co.il](http://www.enercon.co.il)  
[sales@enercon.co.il](mailto:sales@enercon.co.il)  
+972-73-246 9200



**Gurgaon, India**  
[www.mpsindia.in](http://www.mpsindia.in)  
[sales@mpsindia.in](mailto:sales@mpsindia.in)  
+91-124-651 0010

**Applications**

Military (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial Power Supply

**Special Features**

- Wide input range
- Input / Output isolation
- High efficiency – up to 90%
- High Density – **up to 47 W/in<sup>3</sup>**
- EMI filters included
- Remote sense compensation
- Parallel connection option
- Fixed switching freq. (250 kHz)
- External sync. capability
- Remote inhibit (on/off)
- Non-latching protections:
  - Overload / short-circuit
  - Input OV/UV lockout
  - Output over-voltage
  - Over temperature

**Electrical Specifications**

**DC Input**

18 to 48 V<sub>DC</sub>,  
 Extended input range option:  
 18 to 100 V<sub>DC</sub>  
 IAW MIL-STD-1275E.

**Transient protection**

IAW MIL-STD-1275A,  
 MIL-STD-704A  
 (no operation, no damage)

**Output Voltage Regulation**

Up to ±1%  
 (no load to full load, –55°C to +85°C, and over input voltage range).

**Ripple and Noise**

Less than 50 mV<sub>p-p</sub>, typical (max. 1% of output voltage) without external capacitance. When connected to system capacitance ripple drops significantly.

**DC Output**

Voltage range: 5 to 50 V<sub>DC</sub>  
 Current range: 0 to 40 A  
 Power range: 0 to 500 W  
 Peak power: Up to 750 W for up to 4 seconds.  
 After 4 seconds, the output falls to 70% from its nominal value.

**Efficiency**

Typical: 88% - 90%  
 Extended input range: 83% - 86% (28V<sub>DC</sub> output, nominal input, full load, room temperature)

**Transient Over-and-undershoot**

Output change at load transient of 30 to 100% with T<sub>r</sub> & T<sub>f</sub> of max 30 μs is 5% of output voltage. Output recover to steady state within less 0.5 ms.

**Isolation**

Input to Output: 200 V<sub>DC</sub>  
 Input to Case: 200 V<sub>DC</sub>  
 Output to Case: 100 V<sub>DC</sub>

**EMC**

Meets\* MIL-STD-461F  
 CE101, CE102, CS101, CS114, CS115, CS116, RE101, RE102, RS101, RS103

**Turn on Transient**

No voltage overshoot during power on.

\* EMC Compliance achieved with 5μH LISN, shielded harness and static resistive load.

**Protections<sup>†</sup>**

**Input**

- **Input Reverse Polarity:**  
Protection for unlimited time
- **Under-Voltage Lock-Out:**  
Unit shuts down below 15V ± 1V. Resumes operation at 17V ± 1V. Min. hysteresis 2V.
- **Over-Voltage Lock-Out:**  
Unit shuts down above 54V ± 2V.

**Output**

- **Active Over-Voltage Protection:**  
Secondary control circuit takes over if output voltage exceeds 110% ± 5% of nominal voltage.
- **Passive Over-Voltage Protection:**  
Zener diode installed on output terminals, selected at 120% ± 10% of nominal voltage.
- **Peak Load Duration Limiter**  
Peak load is enabled for up to 4 seconds. Beyond this, output voltage folds to limit the output power to the nominal value.
- **Short Circuit Protection**  
Output voltage turns off and on periodically with low duty-cycle (hiccup) to protect system conductors and converter from short circuit.

**General**

- **Over Temperature Protection:**  
Output shuts down if base plate temperature exceeds +105°C ± 5°C. Automatic recovery when baseplate temperature returns to below +95°C ± 5°C.
- **POR:**  
Protection Override signal (BATTLE SHORT function) overrides over temperature protection and input over/under-voltage lock-out.

**Environmental Conditions**

Meets MIL-STD-810F

**Temperature**

Operating: -55 °C to +85 °C (at baseplate)  
Storage: -55 °C to +125 °C

**Altitude**

Method 500.4  
Procedures I & II  
Up to 70,000 ft. Operational

**Salt Fog**

Method 509.4

**Humidity**

Method 507.4  
Procedure I  
Up to 95% RH

**Vibration (random)**

Method 514.5  
Category 24 – General minimum integrity exposure  
IAW Figure 514.5C-17  
1 hour per axis.

**Shock**

Method 516.5  
Procedure I – Functional shock  
Saw-tooth, 30 g peak, 11 ms

**Reliability**

150,000 hours, calculated per MIL-HDBK-217F Notice 2 at +85 °C baseplate, Ground Fix conditions.


**Environmental Stress Screening (ESS)**

Including random vibration and thermal cycles is also available. **Please consult factory for details.**


<sup>†</sup> Thresholds and protections can be modified / removed – please consult factory.

### Efficiency Plots

28 V<sub>DC</sub> variant:

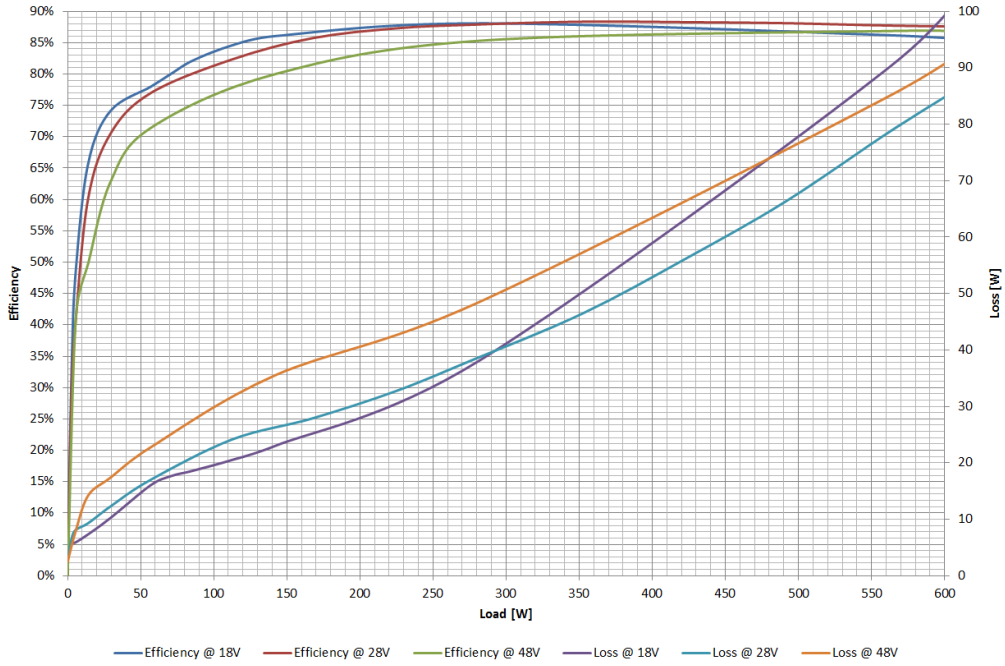

50 V<sub>DC</sub> variant:

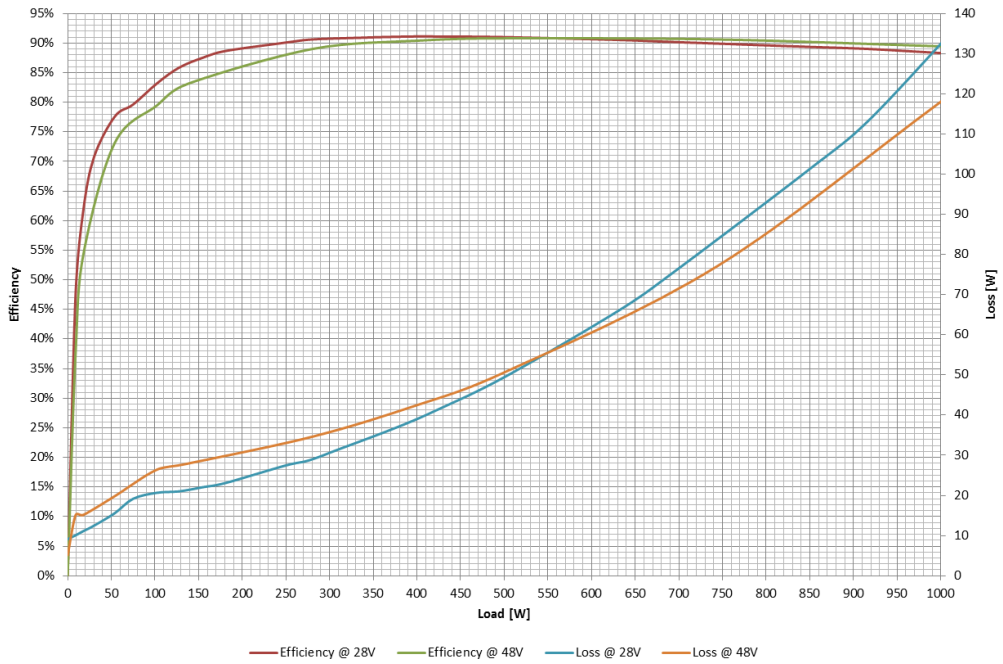

**Pin Assignment**


Connector type: M24308/24-34F or eq.

Mates with: M24308/2-4F or eq.

Pin No.	Function	P	
1	SENSE	+	⊗
2	OUT	+	●
3	OUT	+	●
4	OUT	+	●
5	OUT RTN	-	●
6	OUT RTN	-	●
7	OUT RTN	-	●
8	OUT RTN	-	●
9	SENSE RTN	-	
10	N.C.		
11	INHIBIT		
12	IN	+	⊗
13	IN	+	⊗

Pin No.	Function	P	
14	IN RTN	-	⊗
15	IN RTN	-	⊗
16	N.C.		
17	N.C.		
18	N.C.		
19	N.C.		
20	OUT	+	●
21	OUT	+	●
22	OUT	+	●
23	OUT	+	●
24	OUT	+	●
25	OUT RTN	-	●
26	OUT RTN	-	●

Pin No.	Function	P	
27	OUT RTN	-	●
28	OUT RTN	-	●
29	SYNC IN		
30	IN	+	⊗
31	IN	+	⊗
32	IN	+	⊗
33	IN RTN	-	⊗
34	IN RTN	-	⊗
35	IN RTN	-	⊗
36	POR	+	
37	SIGNAL RTN	-	



Note: All pins with identical function/designation should be connected together for optimal performance.

**Functions and Signals**

**INHIBIT**

The **INHIBIT** signal is used to turn the power supply ON and OFF.  
 To turn the power supply OFF, apply a TTL “0” signal or SHORT to **SIGNAL RTN**.  
 To turn the power supply ON, apply a TTL “1” signal or leave this pin OPEN.  
 If not used (always ON), leave this pin OPEN.  
 This signal is referenced to **SIGNAL RTN**.

**SYNC IN**

The **SYNC IN** signal is used to allow the power supply frequency to sync with the system frequency.  
 The system frequency should be 250 kHz ± 10 kHz.  
 When not connected the power supply will work at 250 kHz ± 10 kHz.  
 This signal is referenced to **SIGNAL RTN**.

**POR (Protection Override)**

The **POR** signal disables the input under voltage lockout, input over voltage lockout, over temperature protection and peak load duration limiter.  
 TTL “0” or short to **SIGNAL RTN** – Protections are disabled (BATTLE SHORT mode).  
 TTL “1” or open circuit – Protections are enabled (Protected mode).  
 For normal protected operation, leave this pin OPEN.  
 This signal is referenced to **SIGNAL RTN**.


**SIGNAL RTN**

The **SIGNAL RTN** is referenced to **IN RETURN**.  
 This is used as grounding for **SYNC IN**, **INHIBIT** and **POR** signals.


**SENSE**

The **SENSE** is used to achieve accurate load regulations at load terminals (this is done by connecting the pins directly to the load’s terminals). The use of remote sense has a limit of voltage dropout between converter’s output and load terminals up to 0.5V.  
 When not used connect **SENSE** to **OUT** and **SENSE RTN** to **OUT RTN**.


**Typical Connection Diagram**

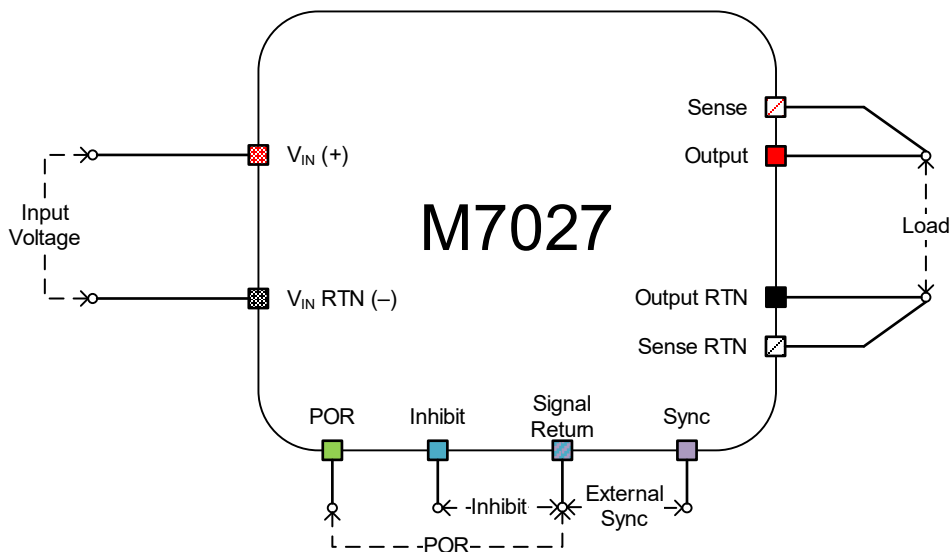


*Parallel Operation - Typical Connection Diagram*

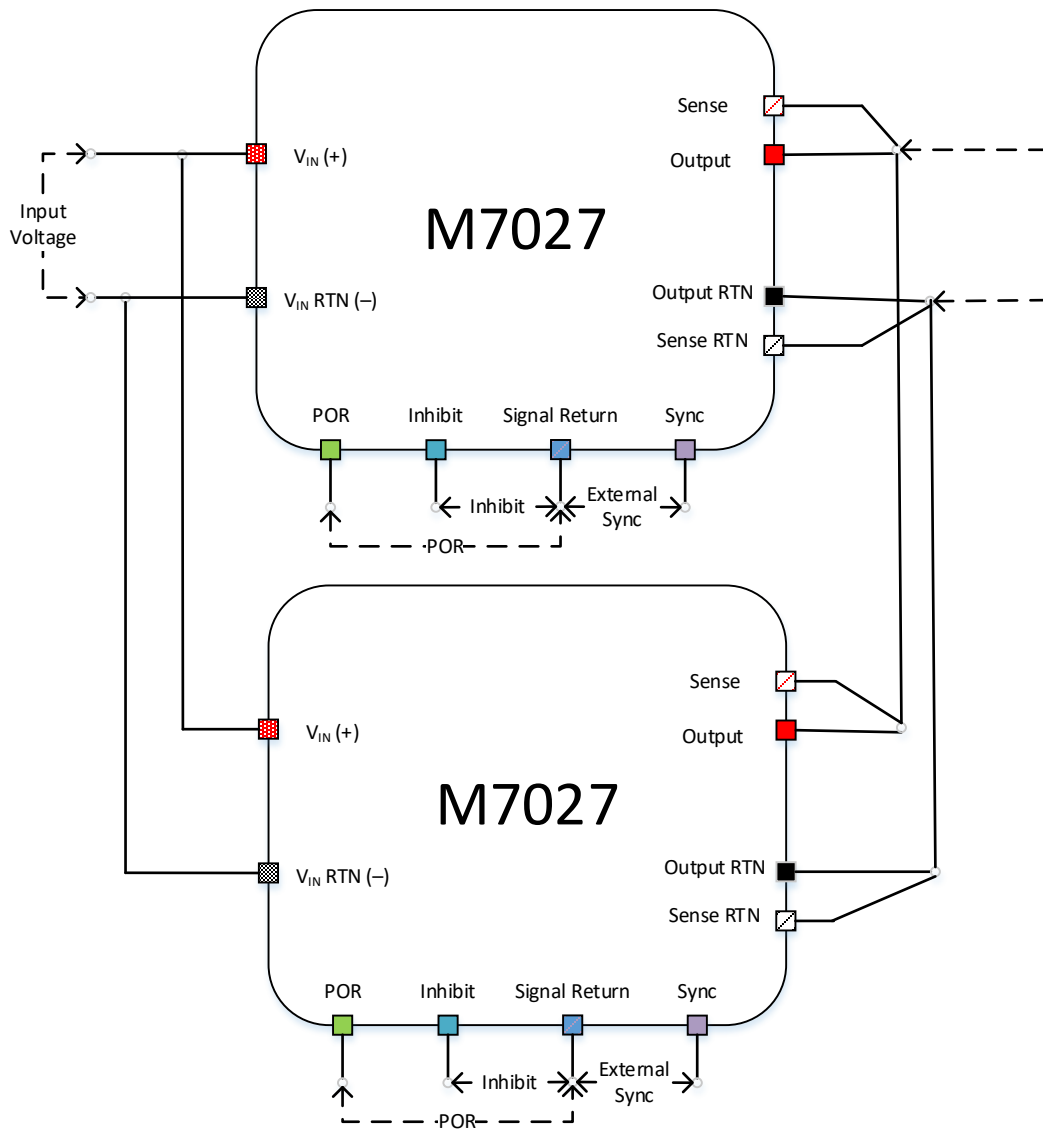

**Outline Drawing**

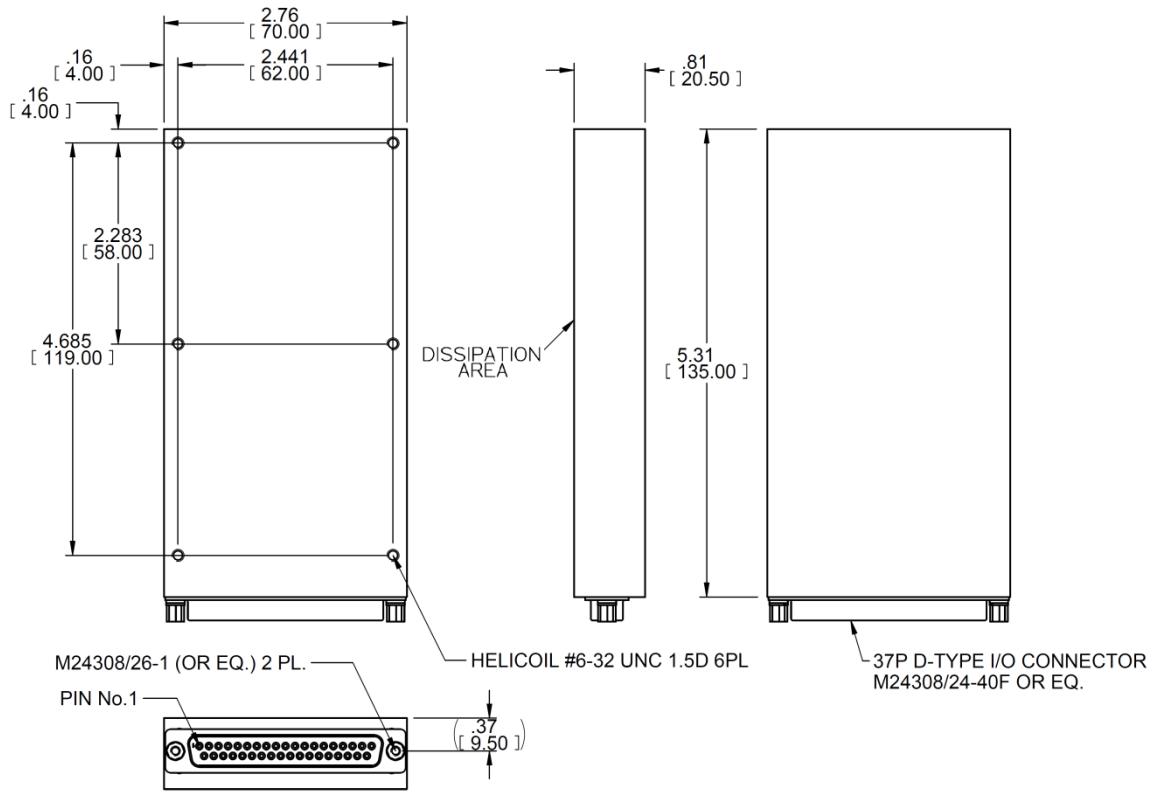

**Heat Dissipation Surface**

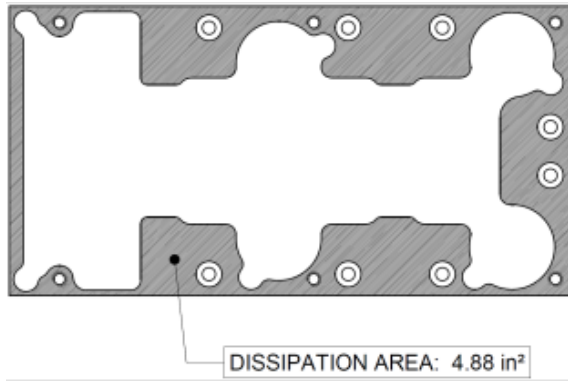

**Notes**

1. Dimensions are in inches [mm]
2. Tolerance is:  
 .XX ± 0.02 in  
 .XXX ± 0.008 in
3. Weight: Approx. 14.1 oz [400 g]



*Standard Configurations*

Part Number	Input	Output		Special features
	Voltage range	Voltage	Current	
M7027-100	18 to 48 V <sub>DC</sub>	5 V <sub>DC</sub>	40 A	
M7027-101	18 to 48 V <sub>DC</sub>	12 V <sub>DC</sub>	40 A	
M7027-102	18 to 48 V <sub>DC</sub>	15 V <sub>DC</sub>	33 A	
M7027-103	18 to 48 V <sub>DC</sub>	24 V <sub>DC</sub>	21 A	
M7027-104	18 to 48 V <sub>DC</sub>	28 V <sub>DC</sub>	18 A	
M7027-105	18 to 48 V <sub>DC</sub>	48 V <sub>DC</sub>	10.5 A	
M7027-106	18 to 48 V <sub>DC</sub>	28 V <sub>DC</sub>	20 A	Parallel operation via output voltage droop. Voltage regulation is $\pm 2\%$ . <b><i>See catalog page for additional information.</i></b>

***Note: Specifications are subject to change without prior notice by the manufacturer.***