

M7017 SERIES

DC/DC POWER SUPPLY



PRODUCT HIGHLIGHTS

- MINIATURE
- HIGH DENSITY
- SINGLE OUTPUT
- DC/DC POWER SUPPLY
- UP TO 200 W CONTINUOUS,
330 W PEAK



<p>Applications</p> <p>Military (Airborne, ground-fix, shipboard), Ruggedized, Telecom, Industrial</p>					
<p>Special Features</p> <ul style="list-style-type: none"> • Miniature size • High efficiency • Wide input range • Input / Output isolation • Remote sense • External On/Off Inhibit • High Density – up to 25.3 W/in³ • <u>Fixed</u> switching frequency (250 kHz) • External synchronization capability • <u>EMI</u> filters included • Indefinite short circuit and current limit protection with auto-recovery • Over-voltage shutdown with auto-recovery • Over temperature shutdown with auto-recovery 					
<p>Electrical Specifications</p> <table border="0" style="width: 100%;"> <tr> <td style="vertical-align: top; width: 33%;"> <p><u>DC Input:</u> 18 to 48V_{DC} per MIL-STD-704F. Works thorough surges as defined by: MIL-STD-704A (80V for 0.1 Sec) No damage for: MIL-STD-1275A (100V for 50mSec)</p> <p><u>Line/Load regulation:</u> Less than 1% (no load to full load, -55°C to +85°C, and over input voltage range).</p> <p><u>Ripple and Noise:</u> Less than 50mV_{p-p}, typical (max. 100mV) without external capacitance. When connected to system capacitance ripple drops significantly.</p> </td> <td style="vertical-align: top; width: 33%;"> <p><u>DC Output:</u> Output range – 1.5V to 60V Output current – up to 15A Output power – steady state 200W Peak power – 330W up to 5 Sec (after that overload protection turns output to 70% from output).</p> <p><u>Efficiency:</u> Typical 88-90% - (full load, room temperature) at worst case.</p> <p><u>Load Transient Overshoot and undershoot</u> Output change at load transient of 30%-100% with t_r & t_f of max 30µsec is 5% of output voltage. Output recover to steady stated within less 0.5ms.</p> </td> <td style="vertical-align: top; width: 33%;"> <p><u>Isolation:</u> 200V between Input and Output 200V between Input and Case 100V between Output and Case</p> <p><u>EMC:</u> Designed to meet* MIL-STD-461F CE101, CE102, CS101, CS114 CS115, CS116, RE101, RE102 RS101, RS103</p> <p><u>Turn on Transient</u> No voltage overshoot during startup.</p> </td> </tr> </table>			<p><u>DC Input:</u> 18 to 48V_{DC} per MIL-STD-704F. Works thorough surges as defined by: MIL-STD-704A (80V for 0.1 Sec) No damage for: MIL-STD-1275A (100V for 50mSec)</p> <p><u>Line/Load regulation:</u> Less than 1% (no load to full load, -55°C to +85°C, and over input voltage range).</p> <p><u>Ripple and Noise:</u> Less than 50mV_{p-p}, typical (max. 100mV) without external capacitance. When connected to system capacitance ripple drops significantly.</p>	<p><u>DC Output:</u> Output range – 1.5V to 60V Output current – up to 15A Output power – steady state 200W Peak power – 330W up to 5 Sec (after that overload protection turns output to 70% from output).</p> <p><u>Efficiency:</u> Typical 88-90% - (full load, room temperature) at worst case.</p> <p><u>Load Transient Overshoot and undershoot</u> Output change at load transient of 30%-100% with t_r & t_f of max 30µsec is 5% of output voltage. Output recover to steady stated within less 0.5ms.</p>	<p><u>Isolation:</u> 200V between Input and Output 200V between Input and Case 100V between Output and Case</p> <p><u>EMC:</u> Designed to meet* MIL-STD-461F CE101, CE102, CS101, CS114 CS115, CS116, RE101, RE102 RS101, RS103</p> <p><u>Turn on Transient</u> No voltage overshoot during startup.</p>
<p><u>DC Input:</u> 18 to 48V_{DC} per MIL-STD-704F. Works thorough surges as defined by: MIL-STD-704A (80V for 0.1 Sec) No damage for: MIL-STD-1275A (100V for 50mSec)</p> <p><u>Line/Load regulation:</u> Less than 1% (no load to full load, -55°C to +85°C, and over input voltage range).</p> <p><u>Ripple and Noise:</u> Less than 50mV_{p-p}, typical (max. 100mV) without external capacitance. When connected to system capacitance ripple drops significantly.</p>	<p><u>DC Output:</u> Output range – 1.5V to 60V Output current – up to 15A Output power – steady state 200W Peak power – 330W up to 5 Sec (after that overload protection turns output to 70% from output).</p> <p><u>Efficiency:</u> Typical 88-90% - (full load, room temperature) at worst case.</p> <p><u>Load Transient Overshoot and undershoot</u> Output change at load transient of 30%-100% with t_r & t_f of max 30µsec is 5% of output voltage. Output recover to steady stated within less 0.5ms.</p>	<p><u>Isolation:</u> 200V between Input and Output 200V between Input and Case 100V between Output and Case</p> <p><u>EMC:</u> Designed to meet* MIL-STD-461F CE101, CE102, CS101, CS114 CS115, CS116, RE101, RE102 RS101, RS103</p> <p><u>Turn on Transient</u> No voltage overshoot during startup.</p>			

*Compliance achieved with 5µH LISN, shielded harness and static resistive load.

Protections *

Input

- **Input reverse polarity:**
Protection for unlimited time
- **Under voltage protection:**
Unit protects itself (shutdown) below 15V_{DC}. Turn on at 16V-18V with min. 3V hysteresis to shut down.
- **Over voltage protection**
– unit protects itself (shut down) above 86V_{DC}.

Output

- **Electronic over voltage protection:** Internal control protects unit (no damage) 10% above nominal voltage.
- **Passive zener on output:** 20% above nominal voltage.
- **Current limiting:** Continuous protection (10-30% above maximum current) for unlimited time (Hick up).

General

- **Over temperature protection:**
Shutdown at base plate temperature of +105°C (±5°C) Automatic recovery at base plate temperature lower than +95°C (±5°C)
- **POR:** Protection override signal for BATTLE SHORT function

* Thresholds and protections can be modified / removed – please consult factory.

Environmental

Design to Meet MIL-STD-810F

Temperature:

Operating: –55°C to +85°C (base plate)
Storage: –55°C to +125°C

Humidity:

Method 507.4 - Up to 95%.

Altitude:

Method 500.4, Procedure I & II, 40,000 ft. and 70,000 ft. Operational

Vibration and Shock:

Shock - Saw-tooth, 30g peak, 11mS.
Vibration - Figure 514.5C-17. General minimum integrity exposure. (1 hour per axis.)

Salt Fog:

Method 509-4

Reliability

150,000 hours, calculated per MIL-STD-217F at +85°C base plate, Ground fixed.

Environmental Stress Screening (ESS)

Including random vibration and thermal cycles is also available. **Please consult factory for details.**

Pin Assignment

P1 – Input				J2 – Output			
Pin No.	Pin Function	Pin No.	Pin Function	Pin No.	Pin Function	Pin No.	Pin Function
1	N/C	9	VIN RTN	1	VOUT RTN	9	N/C
2	SYNC	10	VIN RTN	2	VOUT RTN	10	SENSE
3	INHIBIT	11	VIN	3	VOUT RTN	11	VOUT
4	POR	12	VIN	4	VOUT RTN	12	VOUT
5	SIGNAL RTN	13	VIN RTN	5	VOUT RTN	13	VOUT
6	VIN	14	VIN RTN	6	SENSE RTN	14	VOUT
7	VIN	15	VIN RTN	7	N/C	15	VOUT
8	VIN			8	N/C		

Functions and Signals

INHIBIT signal

The INHIBIT signal is used to turn the power supply ON and OFF.

TTL “1” or OPEN – will turn on the power supply. (For normal operation leave the signal not connected.) TTL “0” or short– will turn off the power supply.

SYNC signal

The SYNC IN signal is used to allow the power supply frequency to sync with the system frequency. The system frequency should be 250kHz \pm 10kHz.

When not connected the power supply will work at 250kHz

SIGNAL RTN

The INPUT SIGNAL RTN is referred to the input.

This is used as grounding for SYNC IN, INHIBIT and POR signals.

SENSE

The SENSE is used to achieve accurate load regulations at load terminals (this is done by connecting the pins directly to the load’s terminals).

The use of remote sense has a limit of voltage dropout between converter’s output and load terminals up to 0.5V.


When not used connect + SENSE to +VOUT and –SENSE to –VOUT

POR (Protection Override)


The POR signal disables the Input Under Voltage protection, Input Over Voltage Protection, Over Temperature protection and Hiccup function (overcurrent and short circuit).

TTL “0” or short – All protections are disabled (override mode). TTL “1” or OPEN – All protections are enabled (protected mode).

Outline Drawing

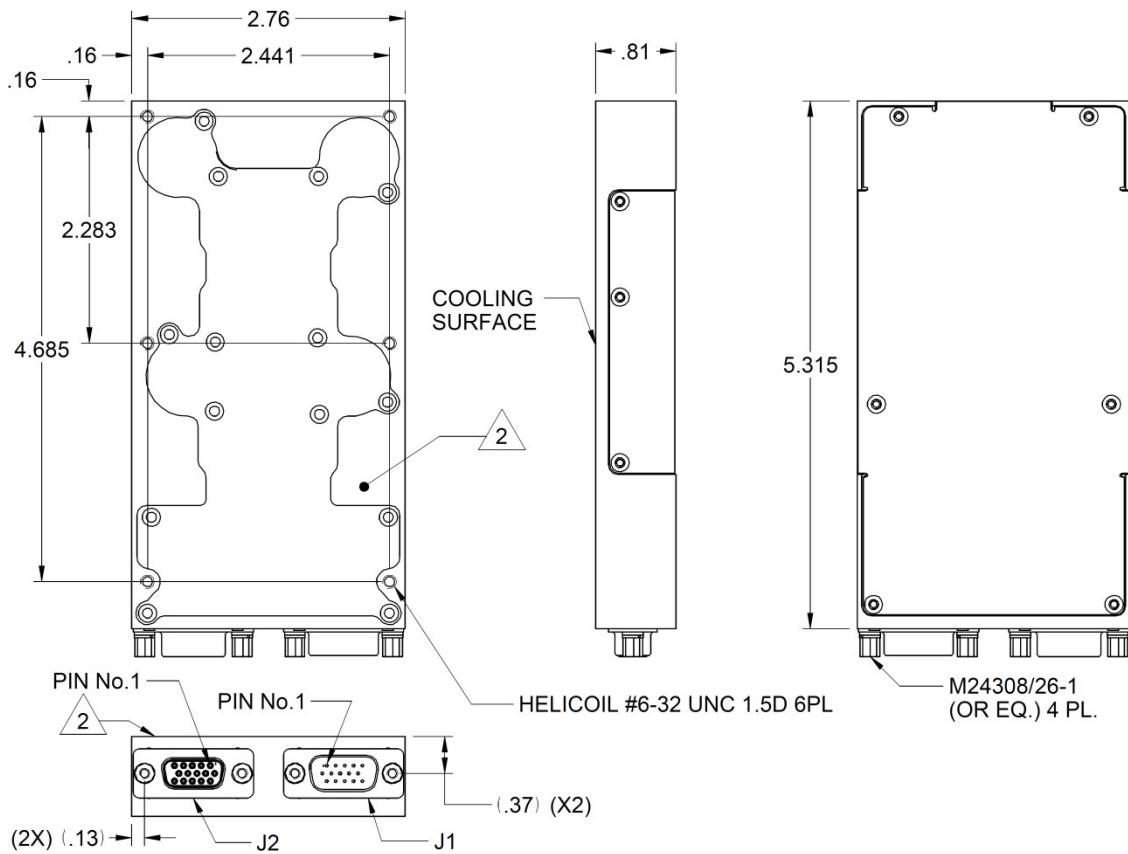

Heat Dissipation Surface

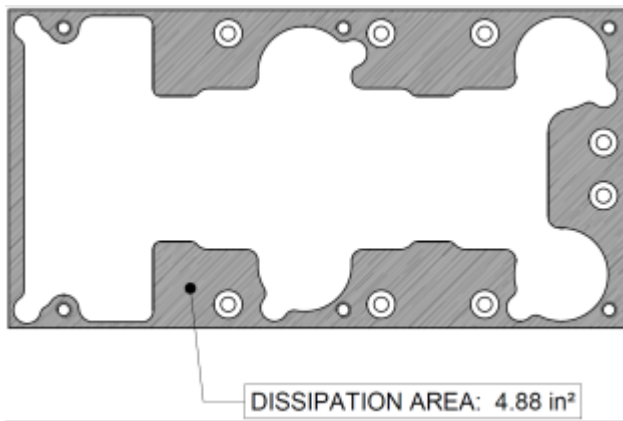

Notes

1. Dimensions are in Inches [mm]
2. Tolerance is:
 .XX ± 0.02 IN
 .XXX ± 0.008 IN
3. Weight: Approx. 400g (14.1 oz)
4. Mounting holes can be modified—please consult factory.
5. Parasolid 3D module is available for download on site.

* Specifications are subject to change without prior notice by the manufacturer.